



## PLANTING NOTES

- 
- PROPOSED *SORBUS AUCUPARIA* (SO)  
MOUNTAIN-ASH
- PROPOSED *GLEDITSIA TRICANTHOS* (GT)  
HONEY LOCUST
- PROPOSED *CELTIS OCCIDENTALIS* (COC)  
HACKBERRY
- PROPOSED *THUJA OCCIDENTALIS* (TO)  
EASTERN WHITE CEDAR
1. This drawing shall be read in conjunction with all relevant **Architectural, Engineering, and related drawings and documents.**
  2. Refer to **Engineering Drawings for Grading, Provide drainage as indicated in grading plan. Round all toes and trees of slopes, smoothly. Compact all areas to 95% Standard Proctor Density unless otherwise noted.**
  3. **Refer to Architectural Drawings for site layout.**
  4. Refer to **Engineering Drawings for site servicing.**
  5. Contractor must contact utility companies for locates prior to excavation or planting.
  6. It is essential to use the plans and details in conjunction with the specifications and notes.
  7. Existing trees to be retained shall be protected according to the contract detail and specifications.
  8. Plant material shall be No. 1 Grade and shall comply with Canadian Standards for Nursery Stock (latest edition) published by the Canadian Nursery Landscape Association.
  9. Use plant material with strong fibrous root system free of disease, defects or injuries, and structurally sound. Use trees with straight trunks, well and characteristically branched for species. Obtain approval from the Architect for plant material at source prior to digging. All trees and shrubs shall be container grown, potted, W/B or B/B, as indicated on Plant List. Bare root planting will only be acceptable for certain species and as approved by the Landscape Architect.
  10. Plant material substitutions shall not be permitted without the written approval from the consultant, with **48 hours notice**, prior to shipping plant material.
  11. Plant locations are schematic/ approximate only. **Contractor shall make out locations on site for approval by the Landscape Architect prior to installation.** The illustrated number of plants shown in the Planting Plan supersedes the estimated number in the Plant List. Contractor shall identify any discrepancies to the Landscape Architect prior to installation. Contractor will assume full responsibility if the Landscape Architect is not notified.
  12. Ensure trees are thoroughly watered following planting. Monitor material and ensure adequate moisture until acceptance.
  13. In heavy dry or poorly drained soils, set root ball with root collar 75-100mm higher than finished grade.
  14. Sod and/or seed areas to receive **100mm depth** topsoil as specified. Sod shall be No. 1 Kentucky Bluegrass Sod grown from minimum mixture of 3 Kentucky Bluegrass cultivars. Quality and source shall comply with Canadian Standards for Nursery Stock, Section 17, (latest edition) published by the Canadian Nursery Landscape Nursery Landscape Association. Unless otherwise specified, turf is to be maintained by the contractor until a second cutting is accepted by the Landscape Architect.
  15. Reinstale all areas damaged or disturbed beyond the Limit of Work.

- POST AND RAIL FENCE
- WOOD PRIVACY FENCE

## PLANT LIST

KEY	QTY	BOTANICAL NAME	COMMON NAME	SIZE	COND	SPACING
<b>DECIDUOUS TREES</b>						
COC	1	<i>Celtis occidentalis</i> 'Chicagoland'	Chicagoland Hackberry	50mm Cal	WB	As Shown
GTD	2	<i>Gleditsia triacanthos</i> var. <i>inermis</i> 'Skycole'	Skyline Honey Locust	50mm Cal	WB	As Shown
SD	2	<i>Sorbus aucuparia</i> 'Mitchred'	Mountain-Ash	50mm Cal	WB	As Shown
<b>CONIFEROUS TREES</b>						
TO	2	<i>Thuja occidentalis</i>	Eastern White Cedar	200cm Ht	WB	As Shown

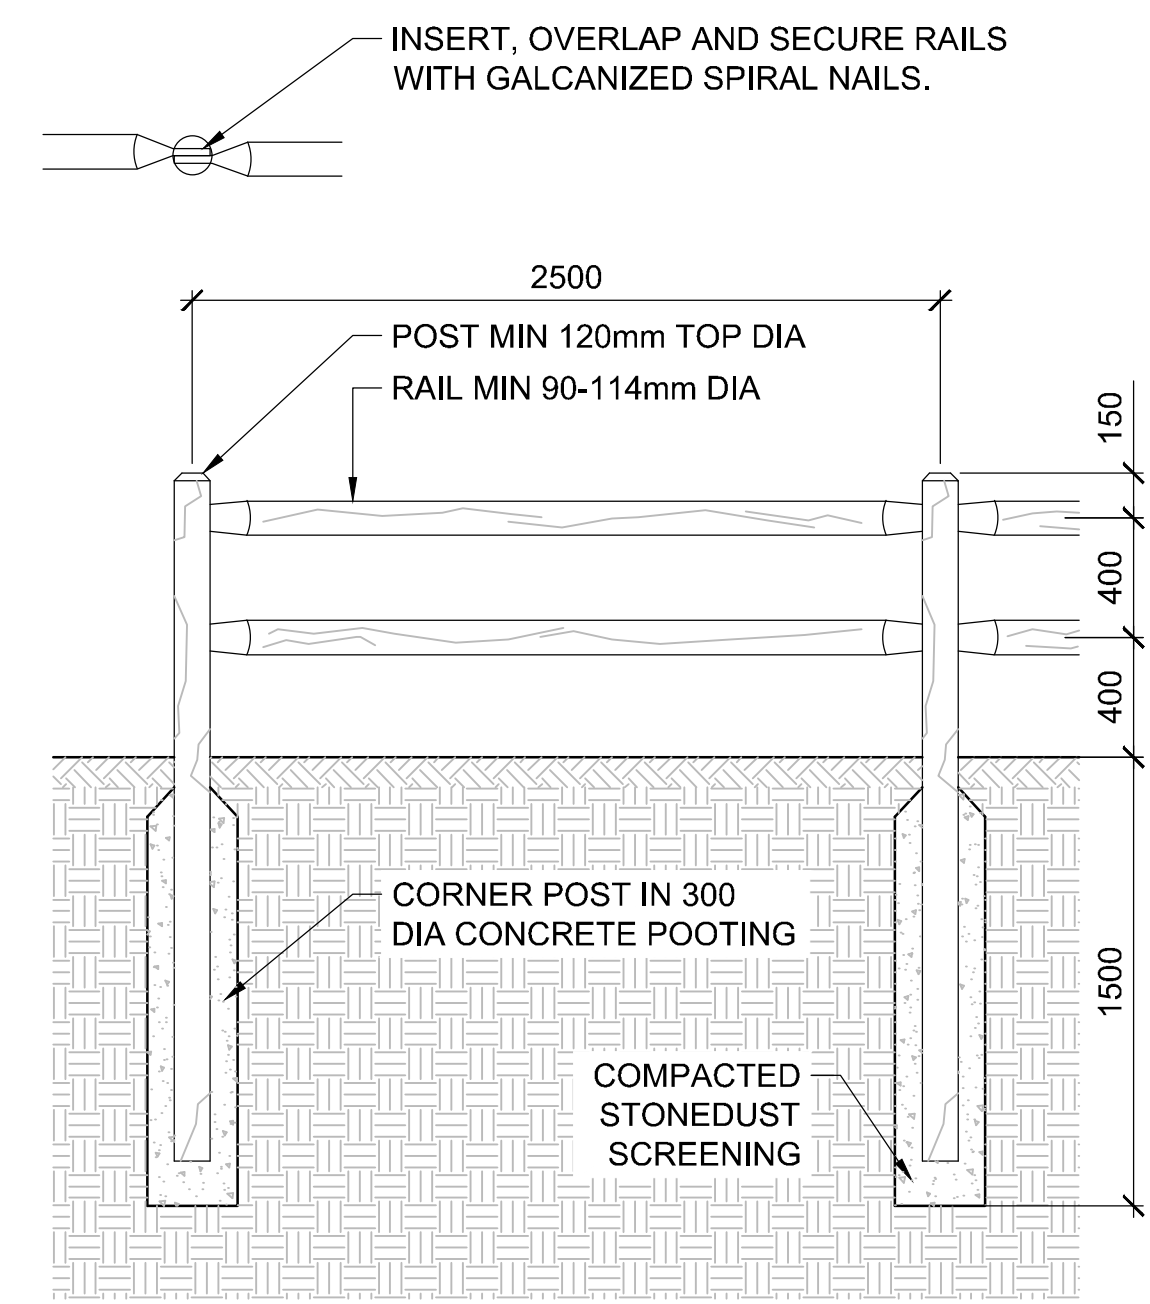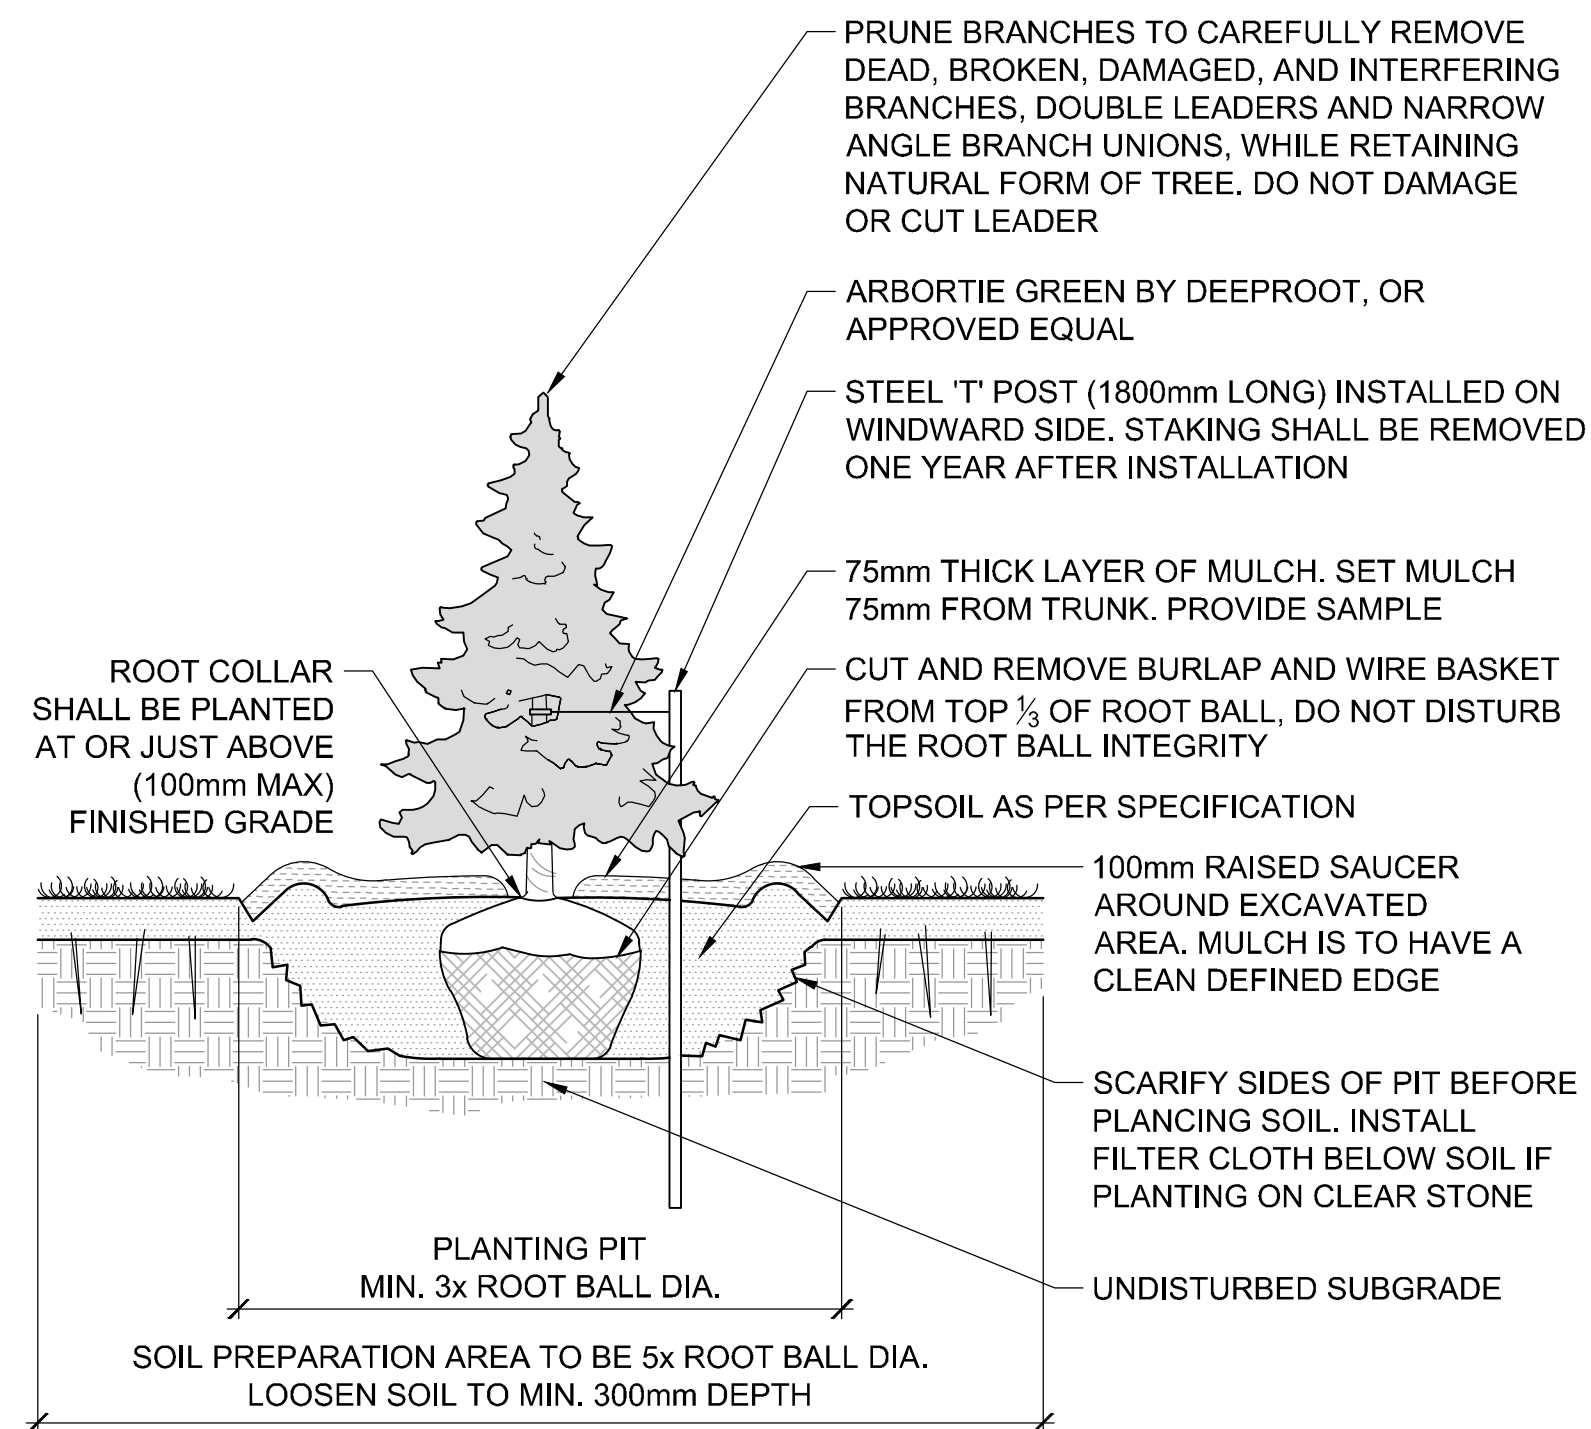

- NOTE:**
1. ALL WOOD TO BE WESTERN RED CEDAR.
  2. FASTEN WOOD MEMBERS WITH GALVANIZED SCREWS.
  3. ALL CONCRETE TO BE C1 EXPOSURE, 35MPa @28 DAYS INCLUDING 5-8% AIR ENTRAINMENT.

- NOTE:**
1. POST AND RAILS TO BE WELL PEELED CEDAR, WITH NO PEELER MARKS.
  2. CORNER AND END POSTS TO HAVE MINIMUM 25 x 100 OBLONG HOLES FOR RAILS. LINE POSTS TO HAVE MINIMUM 64 x 100 OBLONG HOLES FOR RAILS.
  3. SOURCE OF WOOD FENCING TO BE APPROVED BY THE CITY OF OTTAWA.
  4. ALL DIMENSIONS ARE SHOWN IN MILLIMETERS UNLESS OTHERWISE NOTED.
  5. CONCRETE FOOTING SHALL BE CSA 30MPa CLASS F-1.

## D4

**NOTE:**  
THE POSITION OF ALL POLE LINES, CONDUITS, WATERMANS, SEWERS AND OTHER UNDERGROUND AND OVERGROUND UTILITIES AND STRUCTURES IS NOT NECESSARILY SHOWN ON THE CONTRACT DRAWINGS, AND WHERE SHOWN, THE ACCURACY OF THE POSITION OF SUCH UTILITIES AND STRUCTURES IS NOT GUARANTEED. BEFORE STARTING WORK, DETERMINE THE EXACT LOCATION OF ALL SUCH UTILITIES AND STRUCTURES AND ASSUME ALL LIABILITY FOR DAMAGE TO THEM.

[illegible]

SCAL

1:150

1:150

FOR REVIEW ONLY



Engineers, Planners & Landscape Architects  
Suite 200, 240 Michael Cowpland Drive  
Ottawa, Ontario, Canada K2M 1P6

Telephone (613) 254-9644  
Facsimile (613) 254-5861  
Website [www.novatech-eng.com](http://www.novatech-eng.com)

LOCATION  
TOWN OF CARLETON PLACE  
TABER STREET SUBDIVISION - BLOCK 4

DRAWING NAME  
LANDSCAPE PLAN

PROJECT No. \_\_\_\_\_

114151

REV # 2

DRAWING No.

01-1097-0160-0008-xx-707-